


UHF MIRCOPHONE MOUNT RIGHT-HAND SIDE

TLR744010

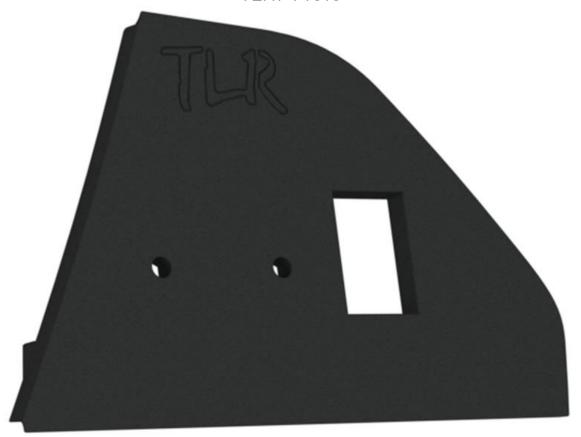

SUITED TO:

FORD RANGER/EVEREST/
RANGER RAPTOR- NEXT GEN SERIES



PRE-INSTALLATION



Read through this installation guide before proceeding.



Fitting time is approx.
30 minutes.



Allen key set, 12 mm drill bit, screwdriver. Trim removal tool, Masking tape

FITTING KIT	
QUANTITY	PART
1	TLR744010 -Mount



NOTE:

This UHF Microphone Mounting Bracket is designed to mount to the Right-Hand side of the center console area

There are mounting holes to accommodate most UHF base plates, along with a 28 x 18mm hole to suit Toyota short switches EG. XRS-RJ45W1 (RJ45 Pass-Through Adapter – Type 1).



FITTING INSTRUCTIONS

- Remove the Small Triangle shape trim piece as shown in <u>Photo 1</u>. There are 3 clips holding this in place, to remove simply lever or pull the piece of trim out from the console to release.
- 2. Install the UHF handpiece mount and RJ45 pass-through into the TLR Products mount. Refer to Photo on previous page for example.
- 3. Carefully use a step drill to create a hole large enough to pass the RJ45 connector through in the bottom surface of the opening shown in *Photo 2*.
- 4. Route the RJ45 cable up behind the plastic side panel of the centre console and out of the hole previously drilled, connect the cable to the pass-through. <u>See photo 2.</u>
- 5. Feed the excess cable back through the hole and firmly push the TLR Products mount into position until all 3 clips are securely in place to finalise installation



instagram.com/tlrproducts facebook.com/tlrproducts



hello@tlrproducts.com.au www.tlrpoducts.com.au







TLR Products 65 Northville Drive Barnsley NSW 2278